

SLIDER BED & SLIDER ROLLER Conveyors

M MACHINEX

Experience Results



The ergonomic design of the slider bed/roller conveyors allows sorters to easily handle the material. Depending on the application, our conveyors are customizable for every type of system: Single-Stream, Construction & Demolition, Mixed Waste Processing, Organics, and Scrap Yard Processing.

TECHNICAL SPECIFICATIONS

Models	Height of the Frame	Frame Thickness	Belt Width	Slider Bed	Carrying Idler	Belt Return Device
Light Duty/QC	6" (150 mm)	3/16" (5 mm)	12" to 48" (305 mm to 1220 mm)	Standard	N/A	N/A
Medium Duty/QC	8" (200 mm)	3/16" (5 mm)	18" to 72" (460 mm to 1830 mm)	Standard	N/A	N/A
Heavy Duty/QC	13" (330 mm)	3/16" (5 mm)	24" to 72" (610 mm to 1830 mm)	Standard	Optional	N/A
Severe Duty/Sorting	17 3/4" (450 mm)	3/16" (5 mm)	24" to 72" (610 mm to 1830 mm)	Standard	Optional	N/A
Sorting/Return Device	21 1/2" (545 mm)	3/16" (5 mm)	24" to 72" (610 mm to 1830 mm)	Standard	Optional	Yes


Slider Bed & Slider Roller

CONSTRUCTION & FEATURES

- ▶ Custom designed and engineered
- ▶ Uni-body conveyor frame
- ▶ Fully enclosed gear motors
- ▶ Full width belt support
- ▶ Self-cleaning bed

OPTIONS

- ▶ Liners
- ▶ Belt scraper Vee Plough
- ▶ Flexibility: Reversible & Shuttle
- ▶ Side ejection device

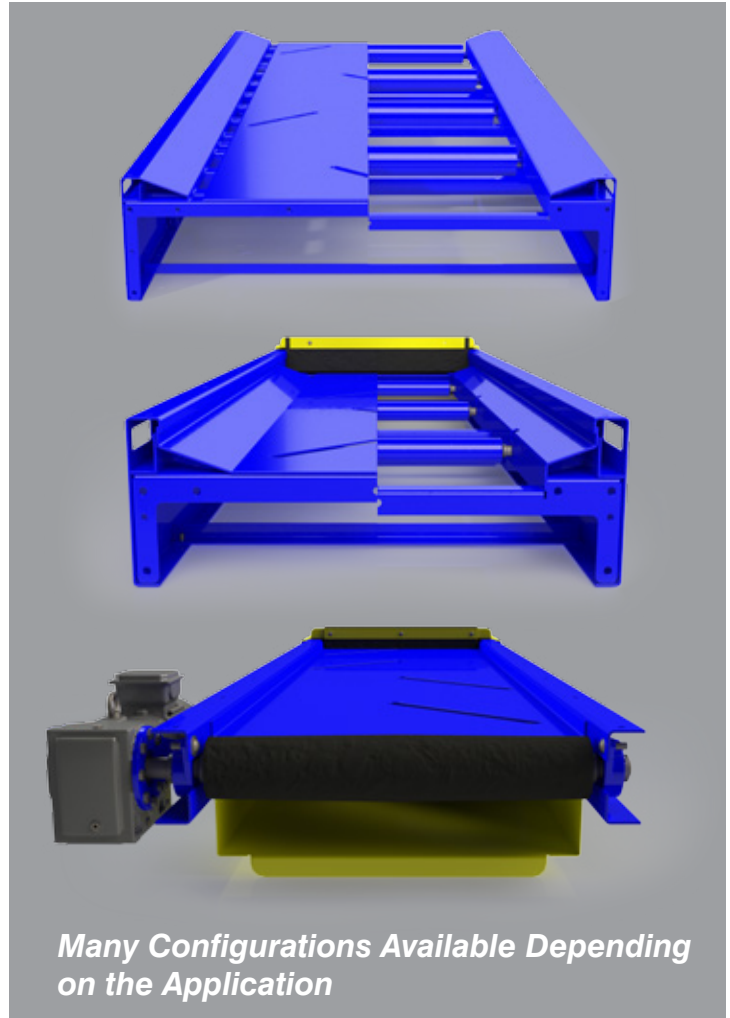

THE SIDE EJECTION DEVICE ALLOWS RETURNING CONTAINERS SORTED ON FIBER SORTING CONVEYORS

